

## WIRING

1959-62 SPORTSTER CH

### WIRING DIAGRAM KEY

- |  |  |
|--|--|
| <p>A. Conduit (One wire) - Black</p> <p>B. Conduit (One wire) - Black</p> <p>C. Conduit (Two wires) - Red and green wires</p> <p>D. Conduit (One wire) - Red</p> <p>E. Conduit (Two wires) - Red and green wires</p> <p>F. Conduit (Two wires) - Red and green wires</p> <p>1. Horn Switch - Black wire</p> <p>2. Headlamp - Black and red wires</p> <p>3. Ignition Cutout Switch - Black wire</p> <p>4. Generator -</p> <p style="padding-left: 20px;">"F" Terminal - Green wire</p> <p style="padding-left: 20px;">"A" Terminal - Red wire</p> <p>5. Headlamp Switch -</p> | <p>Terminal "B" - Red wire</p> <p>Terminal 1 - Green wire</p> <p>Terminal 2 - Red wire</p> <p>Terminal 3 - Black wire</p> <p>6. Fuse - Two green wires</p> <p>7. Voltage Regulator -</p> <p style="padding-left: 20px;">"F" Terminal - Green wire</p> <p style="padding-left: 20px;">"GEN" Terminal - Red wire</p> <p style="padding-left: 20px;">"BAT" Terminal - Red wire</p> <p>8. Magneto - Black wire</p> <p>9. Stoplight Switch - Two red wires</p> <p>10. Tail and Stop Lamp - Red and green wires</p> <p>11. Horn -</p> <p style="padding-left: 20px;">Upper Terminal - Black wire</p> <p style="padding-left: 20px;">Lower Terminal - Three red wires</p> |
|--|--|

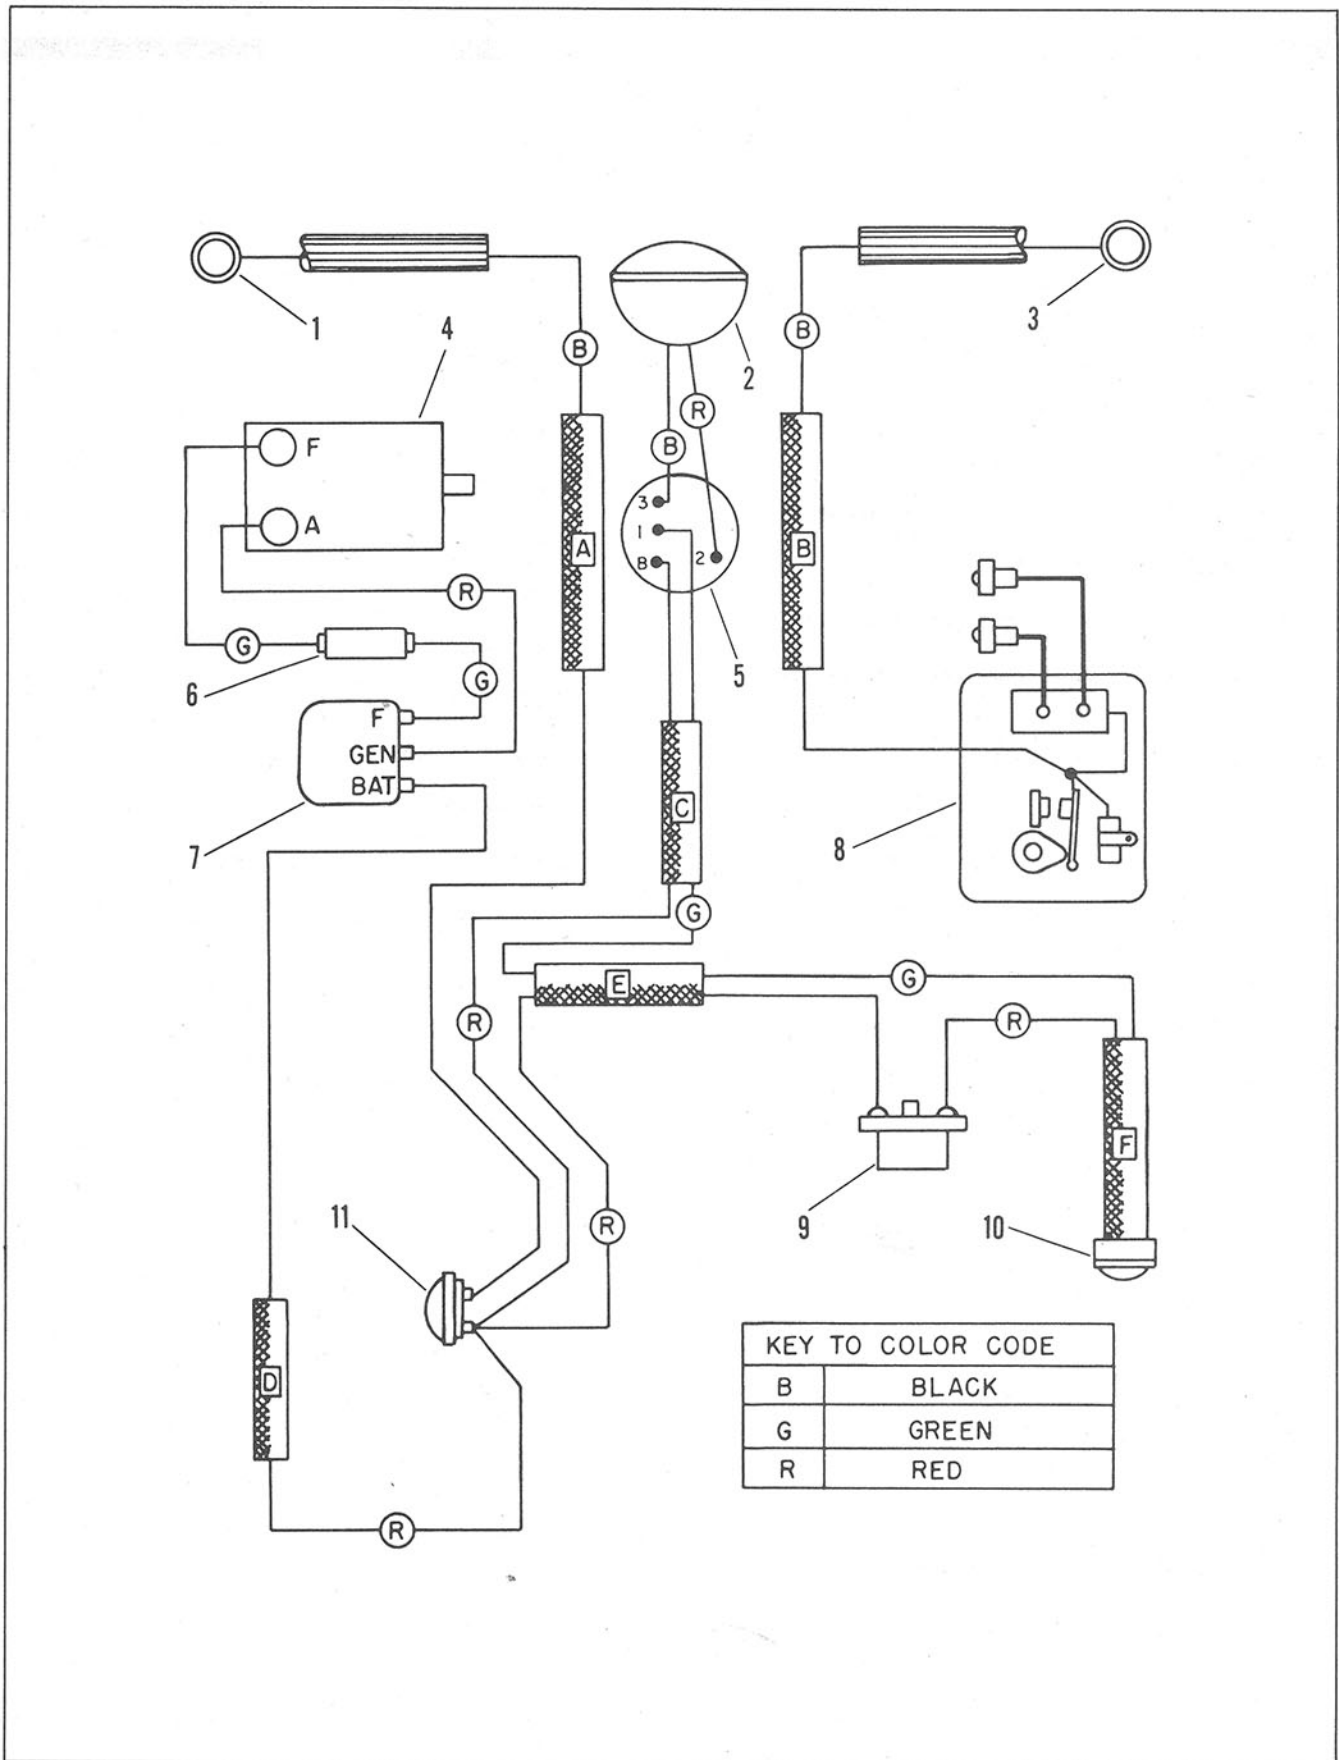


Figure 5B-7. 1959-62 Sportster CH - Wiring Diagram